



落ちふた式U形側溝(本体) JIS A 5372

■形状図

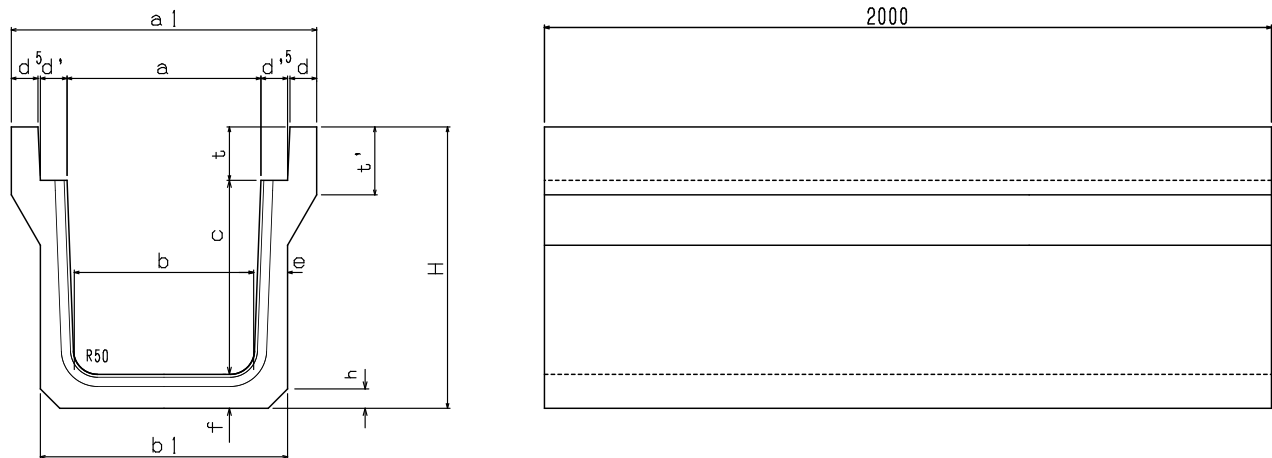

■目地詳細図




■規格表

種類	呼び名	内寸法 a × c	形状寸法(mm)													参考重量 (kg)
			a	a1	b	b1	c	d	d'	e	f	h	t	t'	H	
1種	3 0 0 A	300×300	300	500	280	400	300	40	55	60	60	20	95	120	455	3 4 8
	3 0 0 B	300×400	300	500	270	400	400	40	55	65	65	20	95	120	560	4 2 0
	3 0 0 C	300×500	300	500	260	400	500	40	55	70	70	20	95	120	665	4 9 7
	4 0 0 A	400×400	400	600	370	500	400	40	55	65	65	20	110	135	575	4 5 7
	4 0 0 B	400×500	400	600	360	500	500	40	55	70	70	20	110	135	680	5 3 6
	5 0 0 A	500×500	500	720	460	600	500	45	60	70	70	20	125	150	695	5 9 4
	5 0 0 B	500×600	500	720	450	600	600	45	60	75	75	20	125	150	800	6 8 0
3種	2 5 0	250×250	250	460	230	360	250	45	55	65	65	30	90	120	405	3 3 3
	3 0 0 A	300×300	300	520	280	420	300	50	55	70	70	30	95	140	465	4 1 9
	3 0 0 B	300×400	300	520	270	410	400	50	55	70	70	40	95	140	565	4 7 1
	3 0 0 C	300×500	300	520	260	420	500	50	55	80	80	40	95	140	675	5 8 5
	4 0 0 A	400×400	400	630	370	510	400	55	55	70	70	40	110	140	580	5 1 6
	4 0 0 B	400×500	400	630	360	520	500	55	55	80	80	40	110	140	690	6 3 4
	5 0 0 A	500×500	500	750	460	620	500	60	60	80	80	40	125	155	705	7 0 0
	5 0 0 B	500×600	500	750	450	630	600	60	60	90	90	40	125	175	815	8 4 9


落ちふた式U形側溝(ふた) JIS A 5372

■形状図

(1 種)

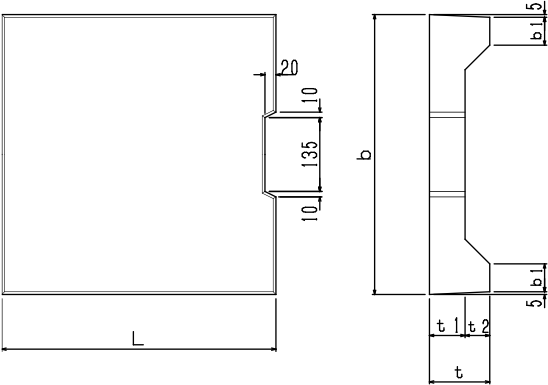

(3 種)

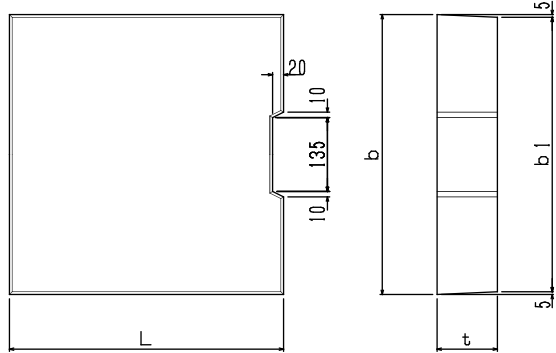

■規格表

種類	呼び名	寸法(mm)						参考重量 (kg)
		b	b1	t	t1	t2	L	
1種	3 0 0	412	51	95	55	40	500	3 3
	4 0 0	512	51	110	65	45	500	4 7
	5 0 0	622	56	125	75	50	500	6 5
3種	2 5 0	362	352	90	—	—	500	3 7
	3 0 0	412	402	95	—	—	500	4 5
	4 0 0	512	502	110	—	—	500	6 5
	5 0 0	622	612	125	—	—	500	9 1